


● Forked Link



Material (%)	C	Si	Mn	Cr	Mo	Ti	Heat treatment	Hardness	Depth
20CrMnTi	0,17-0,23	0,17-0,37	0,80-1,10	1,00-1,30		0,10-0,14	Case hardened	HRC58-62	0,9-1,1 mm
42CrMo	0,38-0,45	0,17-0,37	0,50-0,80	0,90-1,20	0,15-0,25		Through hardened	HRC38-42	

Forked Link	P mm	A mm	B mm	C mm	D mm	E mm	F mm	Material	Breaking load (KN)	Kgs
101,6x36x9	101,6	24	36	9	10	6	14	20CrMnTi	110	0,38
								42CrMo	170	
101,6x36x13	101,6	30	36	13	14	8	14	20CrMnTi	150	0,48
								42CrMo	250	
142x50x19	142	42	50	19	20	12	25	20CrMnTi	300	1,15
								42CrMo	550	
142x50x25	142	55	50	25	26	15	25	20CrMnTi	420	1,50
								42CrMo	740	
142x50x29	142	62	50	29	30	16	25	20CrMnTi	480	1,70
								42CrMo	800	
200x50x25	200	60	50	25	27	18	25	20CrMnTi	410	3,20
								42CrMo	740	

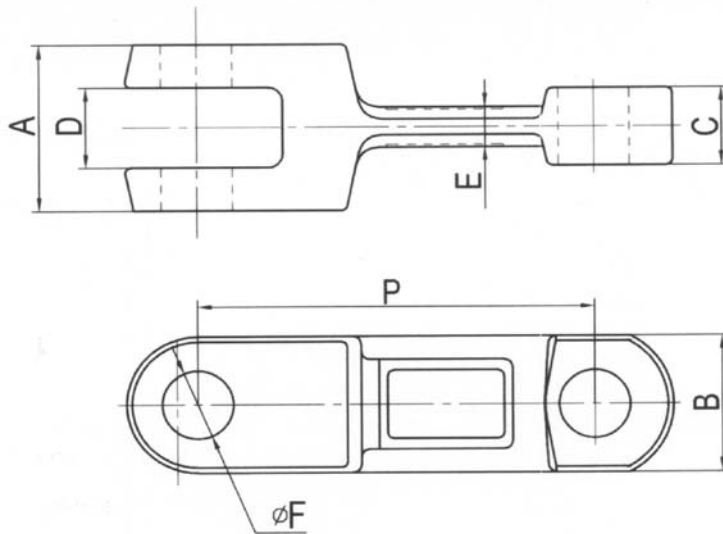