



B 型
B Type

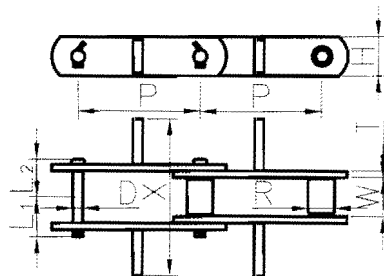

L 型
L Type

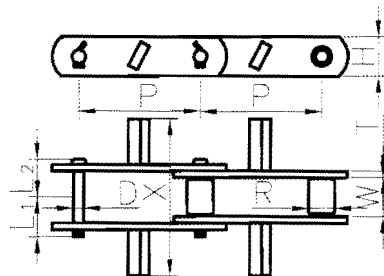

KL 型
KL Type

链号 Chain No.	节距 Pitch	滚子外径 Roller dia.	内节内宽 Inside Width	链板参数 Plate Dimensions				销轴参数 Pin Dimensions			抗拉强度 Ultimate tensile strength				
				P	R(max)	W(min)	T	H	X	Y	D	L1	L2	Q	
														KN	
														普通型 Standard	强力型 High-power
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm			
FW09101	101.6	26.5	27.6	6	32	135	60	12.7	36	30.6	90	160			
FW19152	152.4	34.9	36.5	8	45	175	80	15.9	47.1	40.4	190	285			
FW19200A	200	34.9	36.5	8	45	245	110	15.9	47.1	40.4	190	285			
FW19200B	200	34.9	36.5	8	45	325	140	15.9	47.1	40.4	190	285			
FW25200A	200	40.1	51.8	9	50	245	110	19.1	59.8	51.7	250	400			
FW25200B	200	40.1	51.8	9	50	325	140	19.1	59.8	51.7	250	400			
FW25200C	200	40.1	51.8	9	50	400	170	19.1	59.8	51.7	250	400			
FW32200A	200	44.5	57.6	9	65	325	140	22.2	62.8	55.7	320	510			
FW32200B	200	44.5	57.6	9	65	400	170	22.2	62.8	55.7	320	510			
FW32250	250	44.5	57.6	9	65	470	200	22.2	62.8	55.7	320	510			
FW50250	250	50.8	67.4	12	80	470	200	25.4	74.9	68.1	500	700			
FW50200	200	50.8	57.6	9	65	400	170	25.4	64.2	57.3	-	500			
FW50300	300	50.8	67.4	12	80	570	240	25.4	74.9	68.1	500	700			
FW75200	200	63.5	67.4	12	80	400	170	31.75	78	70	-	750			
FW75250	250	63.5	67.4	12	80	470	200	31.75	78	70	-	750			
FW75300	300	63.5	67.4	12	80	570	240	31.75	78	70	-	750			
FW100250	250	70	75	16	90	470	200	35	90.8	83.2	-	1000			
FW100300	300	70	75	16	90	570	240	35	90.8	83.2	-	1000			
FW100350	350	70	75	16	90	670	280	35	90.8	83.2	-	1000			
FW120300	300	75	82.5	16	100	570	240	38.5	95.5	88	-	1200			
FW120350	350	75	82.5	16	100	670	280	38.5	95.5	88	-	1200			
FW140350	350	82	85	16	115	670	280	41.75	99.3	90.2	-	1400			
FW160350	350	86	92.5	19	120	670	280	44.5	110.3	101.2	-	1600			