


链号 Chain No.	节距 Pitch	内节内宽 Inside Width	滚子直径 Roller diameter	销轴直径 Pin diameter	内链板高度 Inner Plate depth	销轴长度 Pin length		抗拉强度 Ultimate tensile strength	重量 Weight per meter
	P	b1	d1	d2	h2	L	Lc	Q	Q
	mm	mm	mm	mm	mm	mm	mm	KN	Kg/m
S32	29.21	15.88	11.43	4.47	13.50	26.70	28.8	8.0	0.86
S42	34.93	19.05	14.27	7.01	19.80	34.30	37.0	26.7	1.60
S45	41.40	22.23	15.24	5.74	17.30	37.70	40.4	17.8	1.46
S45R	41.40	22.23	32.50	7.16	17.00	39.50	45.0	42.5	1.63
S51	38.10	16.00	15.24	5.74	17.30	30.00	35.0	36.1	1.10
S52	38.10	22.23	15.24	5.74	17.30	37.70	40.4	17.8	1.68
S55	41.40	22.23	17.78	5.74	17.30	37.70	40.4	17.8	1.80
S55R	41.40	22.23	17.78	8.90	22.40	41.00	44.0	44.5	2.49
S62	41.91	25.40	19.05	5.74	17.30	41.00	44.0	26.7	1.87
S77	58.34	22.23	18.26	8.92	26.20	43.20	46.4	44.5	2.65
S88	66.27	28.58	22.86	8.92	26.20	49.80	53.0	44.5	3.25
A550	41.40	19.81	16.70	7.16	19.05	34.50	39.68	47.5	1.78
A620	42.01	24.51	17.91	7.16	19.05	41.50	46.83	47.5	2.44
CA642	41.40	19.00	15.88	8.27	22.20	34.40	44.2	49.8	1.90
CA643	41.40	22.20	15.88	8.27	22.20	41.00	48.3	60.5	2.40
CA645	41.40	22.20	17.78	8.27	22.20	41.00	48.3	60.5	2.60
CA650	50.80	19.05	19.05	9.52	26.70	40.20	46.8	80.0	3.62

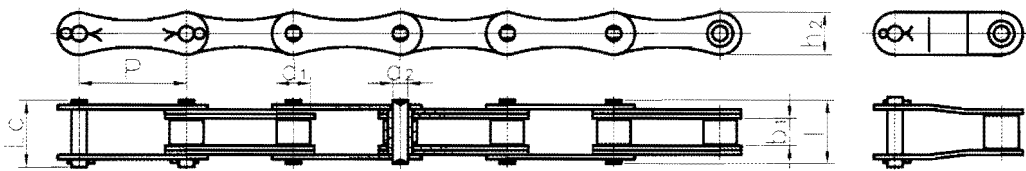

链号 Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Inside Width	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner Plate depth	抗拉强度 Ultimate tensile strength	每米重量 Weight per meter
	p	d1(max)	b1(min)	d2(max)	L(max)	Lc(max)	h2(max)	Q	q
	mm	mm	mm	mm	mm	mm	mm	KN	kg/m
CA650F1	50.8	25.0	19.0	11.28	49.2	53.7	25.0	120.0	4.29