



**04A-1**

**PLATEWHEELS 6 X 2.8mm**

For Chain Acc. to DIN 8187

ISO/R 606

**Stock Bore**

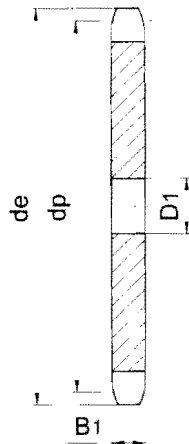

**Accept OEM purchase.**

**PLATEWHEELS mm**

Tooth radius $r_3$	6
Radius width C	0.7
Tooth width $B_1$	2.6

**CHAIN mm**

Pitch	6
Internal width	2.8
Roller $\phi$	4

H=4mm-From Z=51 the width of the plate is increased

Z	$d_s$	$d_p$	S $D_1$
8	18.0	15.68	5
9	19.9	17.54	5
10	21.7	19.42	6
11	23.6	21.30	6
12	25.4	23.18	6
13	27.3	25.07	8
14	29.2	26.96	8
15	31.1	28.86	8
16	33.0	30.75	8
17	35.0	32.65	8
18	36.9	34.55	8
19	38.8	36.45	8
20	40.7	38.35	8
21	42.6	40.26	8
22	44.5	42.16	8
23	46.4	44.06	8
24	48.3	45.97	8
25	50.2	47.87	8
26	52.1	49.78	8
27	54.0	51.68	8
28	55.9	53.59	8
29	57.8	55.49	8
30	59.8	57.40	8
31	61.7	59.31	8
32	63.6	61.21	8
33	65.5	63.12	8
34	67.4	65.03	8
35	69.3	66.93	8
36	71.2	68.84	8
37	73.1	70.75	8
38	75.0	72.66	8
39	76.9	74.57	8
40	78.9	76.47	8
41	80.8	78.38	10
42	82.7	80.29	10

Z	$d_e$	$d_c$	S $D_1$
43	84.7	82.19	10
44	86.6	84.11	10
45	88.5	86.01	10
46	90.4	87.92	10
47	92.3	89.93	10
48	94.2	91.74	10
49	96.1	93.65	10
50	98.0	95.56	10
51	99.9	97.46	12
52	101.8	99.37	12
53	103.7	101.28	12
54	105.6	103.19	12
55	107.6	105.10	12
56	109.5	107.01	12
57	111.4	108.92	12
58	113.3	110.83	12
59	115.2	112.73	12
60	117.1	114.64	12
62	120.9	118.46	14
64	124.7	122.28	14
65	126.6	124.19	14
66	128.5	126.10	14
68	132.3	129.92	14
70	136.1	133.74	14
72	140.0	137.55	16
75	145.7	143.28	16
76	147.6	145.19	16
78	151.4	149.01	16
80	155.2	152.83	16
85	164.8	162.38	16
90	174.3	171.92	16
95	183.9	181.47	16
100	193.4	191.02	16
110	212.5	210.11	16
114	220.2	217.75	16
120	231.6	229.21	16
125	241.2	238.76	16