


SHORT PITCH POWER TRANSMISSION ROLLER CHAINS (B SERIES)

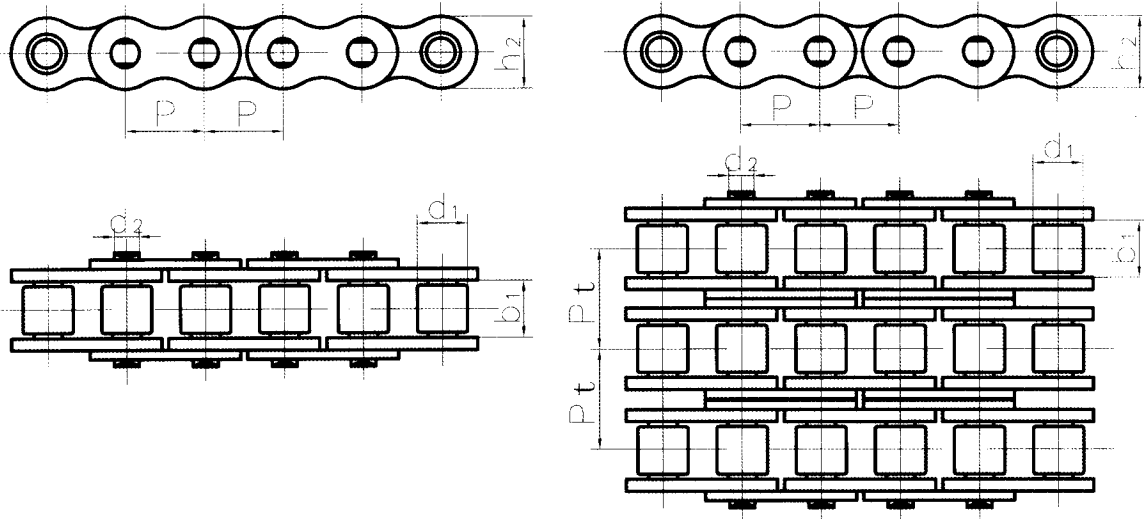

ISO 链号 Chain No.	节距 Pitch	滚子外径 Roller dia.	内链节内宽 Inside Width	销轴直径 Pin dia.	内链板高度 Height of inner plate	排距 Transverse pitch	抗拉强度 Ultimate tensile strength	重量 Weight approx.
ISO	P	d1(max)	b1(min)	d2(max)	h2	Pt	Q	q
	mm	mm	mm	mm	mm	mm	KN	kg/m
03B	5.00	3.20	2.50	1.49	4.10	-	2.00	0.08
04B	6.00	4.00	2.80	1.85	5.00	-	3.00	0.12
05B-1						-	4.40	0.19
05B-2	8.00	5.00	3.00	2.31	7.11	5.64	7.80	0.33
05B-3							11.10	0.48
06B-1						-	8.90	0.38
06B-2	9.525	6.35	5.72	3.28	8.26	10.24	16.90	0.74
06B-3							24.90	1.10
08B-1						-	17.80	0.74
08B-2	12.70	8.51	7.75	4.45	11.81	13.92	31.10	1.47
08B-3							44.50	2.20
10B-1						-	22.20	0.95
10B-2	15.875	10.16	9.65	5.08	14.73	16.59	44.50	1.88
10B-3							66.70	2.81
12B-1						-	28.90	1.25
12B-2	19.05	12.07	11.68	5.72	16.13	19.46	57.80	2.45
12B-3							86.70	3.65